


Lithium Battery Powered Pallet Truck

GBD15J-LI

合力 小锂电

Hell Mini power pallet with lithium battery

- Characteristics:**
1. Simple, flexible, light weight and small turning radius make the truck suitable use in extremely narrow aisle.
 2. Strong structure and open layout make the maintenance easy.
 3. Same hydraulic pump with the hand pallet, simple and reliable.
 4. Integrated handle integrates key and meter make the operation easy and comfortable.
 5. Portable lithium-battery pack provides easy and speedy battery change.
 6. Emergency reversing device ensure safety operation.
 7. Auxiliary wheels on two sides provide well stability.
 8. Manual lift is available as option.


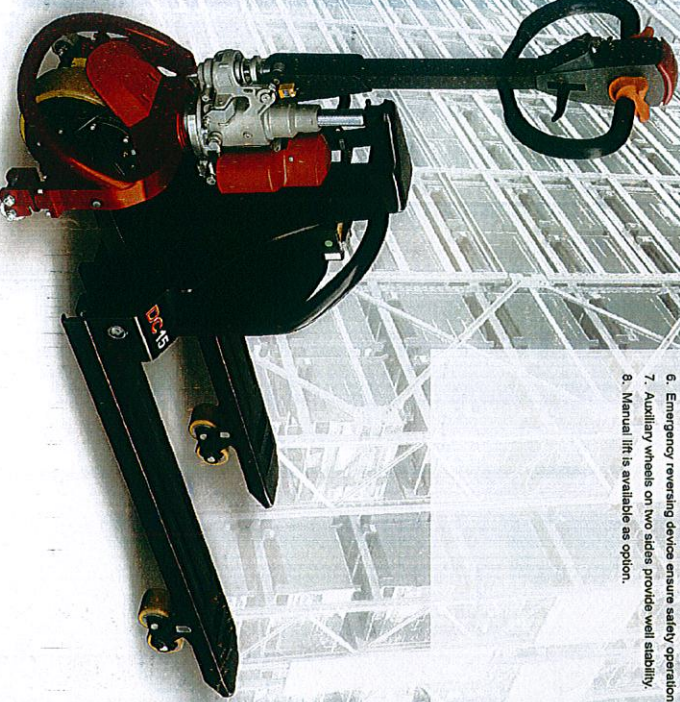


GBD15J-LI

Lithium Battery Powered Pallet Truck

制造商技术参数 Manufacturer's Data and Design Characteristics

1.1	Manufacturer	HELLI	
1.2	Model	GBD15J-LI	
1.3	operator type	Footstran propelled	
1.4	rated capacity	1500	
1.5	lift height	200	
1.6	Service weight with battery	152	156
1.7	Load centre	600	
1.8	Axle centre to fork face	x (mm)	944
1.9	Wheel base	y (mm)	1243
Wheels			
2.1	Type type	Polyurethane	
2.2	Type size, driving wheels	Φ × W (mm)	Φ 210 × 70
2.3	Type size, loading wheels	Φ × W (mm)	Φ 80 × 60
2.4	Wheels, number front/rear (x = driver)	1 × 2/1 × 4	
2.5	Track width, rear loading side	tr1 (mm)	400/335
Dimensions			
3.1	Overall length	l1 (mm)	1615
3.2	Length to fork face	l2 (mm)	465
3.3	Overall width	b1 (mm)	550/685
3.4	Fork dimensions	width (mm)	50/150/150
3.5	Width of fork	b5 (mm)	550/685
3.6	Diameter height	tr3 (mm)	85
3.7	Min.Courad clearance	tr2 (mm)	35
3.8	Height of handle in driving position (H/L/R/fix)	tr4 (mm)	610/1212
3.9	Axle width with pallet (100 × 1200 access type)	Ast (mm)	1815
3.10	Axle width with pallet (800 × 1200 hand fork)	Ast (mm)	1885
3.11	Min. Turning radius	Via (mm)	1405
Performance			
4.1	Travel speed, with/without load	(km/h)	4.2/4.5
4.2	Max. gradiently, with/without load	(%)	5/8
4.3	Service brake type		Electromagnetic brake
5.1	Drive motor output (SZ 60 mm)	(kW)	0.75
5.2	Lift motor rating at S3 15%	(kW)	No
5.3	Battery, according to DIN 43531/59/96 A, B, C/D		0.8
5.4	Battery voltage/nominal capacity	(V/Wh)	24/25
5.5	Battery weight (± 5%)	(kg)	7
6.1	Others		DC
6.2	sound pressure level at the driver's ear	(dB(A))	≤ 75
6.3	Steering type		Mechanical steering

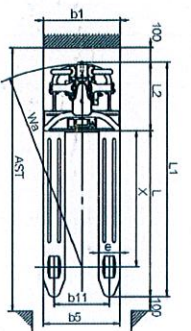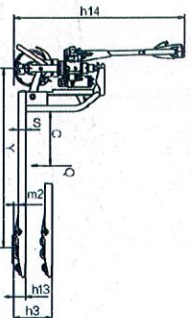

ANHUI HELI CO., LTD.
 ADD: NO.668 Fangming Street, Economic Development Zone, Hefei, P. R. China
 TEL: (86 551) 6363068 / American: 63639258 / Europe: 63639358 / Asian: 63662105 / Africa & Middle East: 63639530 / Warehouse Equipment: 63639531 / Wheel loader
 FAX: (86 551) 63639996
 WEBSITE: <http://www.helichina.net>

AUTHORIZED DEALER

* Our products are subject to improvements and changes without notice.